

RAS 650T

PRECURED TREAD BUILDING AND STITCHING MACHINE FOR TRUCK TYRES

- the machine can process 11 m. rolls of tread or pre-cut treads
- tread cutter
- PLC interactive electronic circumference measurement
- no recipe needed
- guided and centered tread application
- automatic poly removal
- the machine allows to cut treads at the mold pitch mark for a perfect tread match.



matteuzzi srl

macchine per pneumatici e per i processi di ricostruzione
equipment for the tyre and retreading industries

VIA SERRA 1/E,
40012 CALDERARA DI RENO,
BOLOGNA, ITALY

TEL. ++39 - 051726351


FAX ++39 - 051726283

web: www.matteuzzi-srl.com

e-mail: matteuzzi@matteuzzi-srl.com

RAS 650T

PRECURED TREAD BUILDING AND STITCHING MACHINE FOR TRUCK TYRES

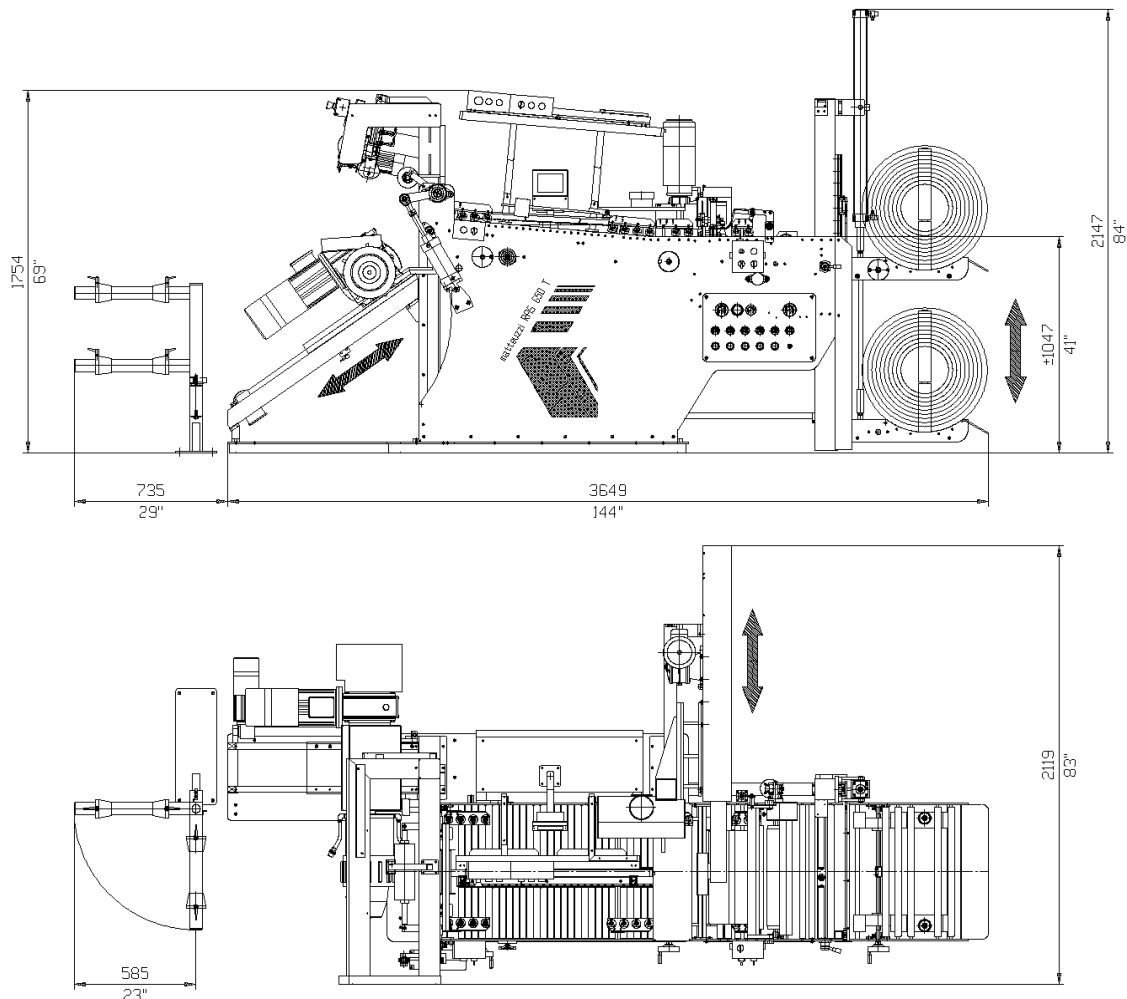

Dimensions of the machine in service

The standard machine is designed to process casings and tread strips having the following sizes:

	<i>MINIMUM</i>	<i>MAXIMUM</i>
<i>External diameter</i>	711 mm (28")	1193 mm (47")
<i>Bead diameter</i>	14"	24.5"
<i>Tyre casing weight</i>	---	110 kg (243 lbs)
<i>Tread width</i>	130 mm (5.1")	420 mm (16.5")
<i>Tread thickness</i>	---	32 mm (1 1/4")
<i>Tread length</i>	---	11 m (433")